

# VYBO Electric a.s.



## Data Sheet

No.


Three Phase Induction Motor

Drawing No.

Customer	
Client reference	
Type	1LC-200L1-2 30KW 400/690V 50HZ
Brand	VYBO Electric

### Identification

Type:	1LC-200L1-2		Frame:	200		mm		
Power:	30	kW	Poles:	2		P		
Rated Current:	380 V	55,4	A	Rated Voltage:	400	/	690	V
	400 V	52,6		Connection:	Δ/Y			
	415 V	50,7		Insulation Class:	F			
Speed:	2950	rpm	Temperature Rise:					
Frequency:	50	Hz	Service Factor:	1,0				
Direct on line starting torque ratio (LRT/RLT):	2		Duty:	S1, S2, S3, S4-S9				
Direct on line pull out torque ratio (BDT/RLT):	2,3		Ambient Temperature:	-35~50°C (On request possible 62°C)				
Direct on line starting current ratio (LRA/RLA):	7,5		Altitude:	1000m				
Efficiency:	91,4	%	Protection Degree:	IP55				
Power factor:	0,9		Cooling:	IC411				
Noise level:	92	dB(A)	Mounting:	IM B (On request)				
Weight:	218	kg	Vibration:	2.8 mm/s				
Rotor inertia:	0,124	kg/m <sup>2</sup>	Direction of Rotation:	Both				
			Starting Method:	DOL or VFD				
			Coupling:	DIRECT				
			Load Type:	Parabolic or linear curve				
			Terminal box:	2xM50X1.5				

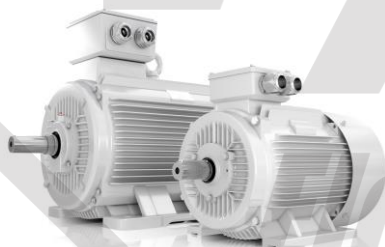

### Bearing Information

	DE	NDE
Bearing:	6312C3	6312C3
Regreasing int.(h):		
Grease amount(g):		
Grease:		

### Notes / Accessories

### Deviation Sheet

	VYBO Electric	Customer

### Standards

Specification:	IEC60034-1 / GB755
Test:	IEC60034-2 / GB/T1032
Noise:	IEC60034-9 / GB10069.3
Vibration:	IEC60034-14 / GB10068

### Edition

Performed	Checked	Date

Item	Changes	Performed	Checked	Date