

VYBO Electric a.s.



Data Sheet

No.


Three Phase Induction Motor

Drawing No.

Customer	
Client reference	
Type	1LC-200L2-2 37KW 400/690V 50HZ
Brand	VYBO Electric

Identification

Type:	1LC-200L2-2		Frame:	200		mm
Power:	37	kW	Poles:	2		P
Rated Current:	380 V	67,9	Rated Voltage:	400	/	690 V
	400 V	64,5		Connection:	Δ/Y	
	415 V	62,2			Insulation Class:	F
Speed:	2950	rpm	Temperature Rise:			
Frequency:	50	Hz	Service Factor:	1,0		
Direct on line starting torque ratio (LRT/RLT):	2		Duty:	S1, S2, S3, S4-S9		
Direct on line pull out torque ratio (BDT/RLT):	2,3		Ambient Temperature:	-35~50°C (On request possible 62°C)		
Direct on line starting current ratio (LRA/RLA):	7,5		Altitude:	1000m		
Efficiency:	92	%	Protection Degree:	IP55		
Power factor:	0,9		Cooling:	IC411		
Noise level:	92	dB(A)	Mounting:	IM B (On request)		
Weight:	230	kg	Vibration:	2.8 mm/s		
Rotor inertia:	0,139	kg/m ²	Direction of Rotation:	Both		
			Starting Method:	DOL or VFD		
			Coupling:	DIRECT		
			Load Type:	Parabolic or linear curve		
			Terminal box:	2xM50X1.5		

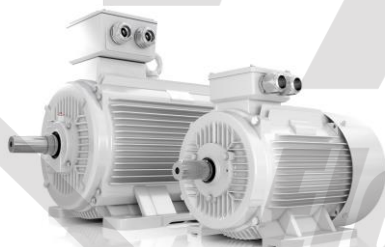

Bearing Information

	DE	NDE
Bearing:	6312C3	6312C3
Regreasing int.(h):		
Grease amount(g):		
Grease:		

Notes / Accessories

Deviation Sheet

Notes / Accessories		Deviation Sheet	
		VYBO Electric	Customer

Standards

Specification:	IEC60034-1 / GB755
Test:	IEC60034-2 / GB/T1032
Noise:	IEC60034-9 / GB10069.3
Vibration:	IEC60034-14 / GB10068

Edition

Performed	Checked	Date

Item	Changes	Performed	Checked	Date